
Product Spec Sheet

digiGate PRO

CONTROL HUB

Wireless transmitter antenna connects to hub via USB port.

Power Input: USB-C mains plug 27W 5.1v 5.0A DC
Network: Gigabit Ethernet RJ45
Data Input: USB for Transmitter Antenna

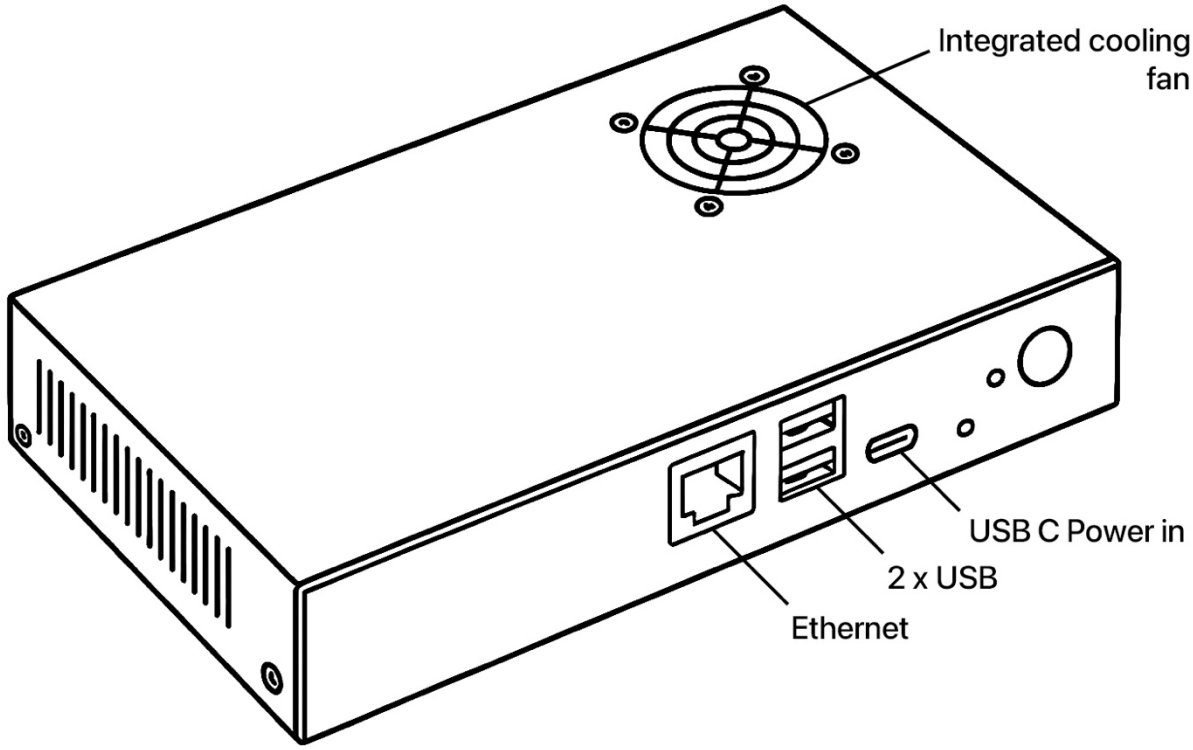


Measurements: 170mm x 94mm x 28mm
Weight: 450g
Material: Sheet metal
Installation: Intended for dry, indoor or protected installations

WIRELESS RECEIVER

2 relays only when connecting directly to gate control board on low current ~ 500mA

Power Input: 9-48v DC via screw terminals **OR** 5v 2A via USB-C
Wireless Connectivity: 868Mhz **OR** 915Mhz (based on region)
Outputs: 4 relays with NO (normally open) + COM (common) + NC (normally closed)
Antenna: SMA connection

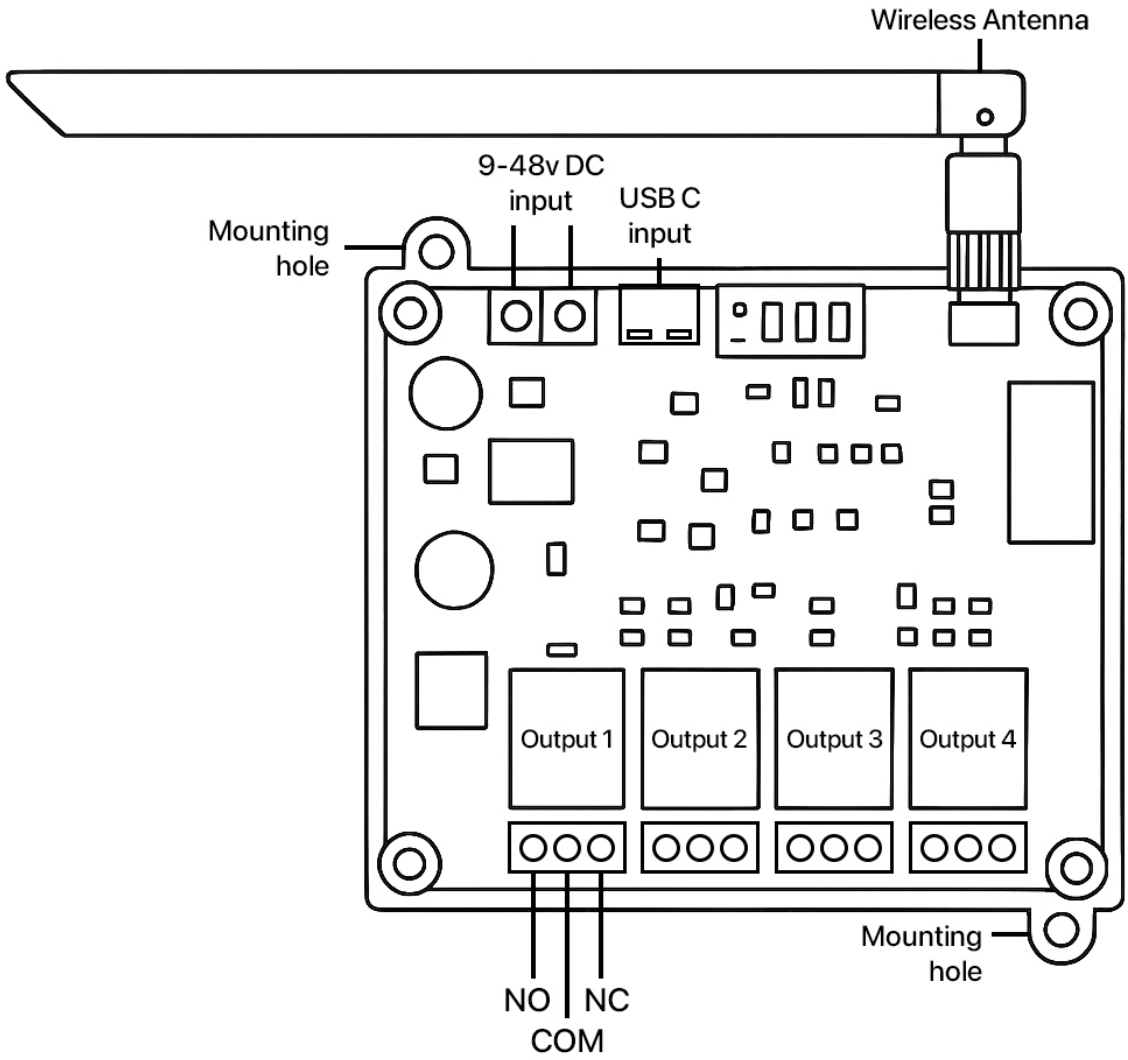


Measurements: 95mm x 100mm x 40mm (antenna 177mm x 35mm with bend)
Weight: 180g
Material: ABS
Mounting: DIN rail rear mount **OR** 2 x mounting holes
Installation: Intended for dry, indoor or protected installations
Range: Up to 600 metres (obstructed) or 1km (line of sight with transmitter).

WIRELESS TRANSMITTER ANTENNA

Wireless transmitter antenna connects to hub via USB port.

Connection: USB-A into Control Hub
Wireless Connectivity: 868Mhz **OR** 915Mhz (based on region)
Display: Shows power status
Antenna: SMA connection

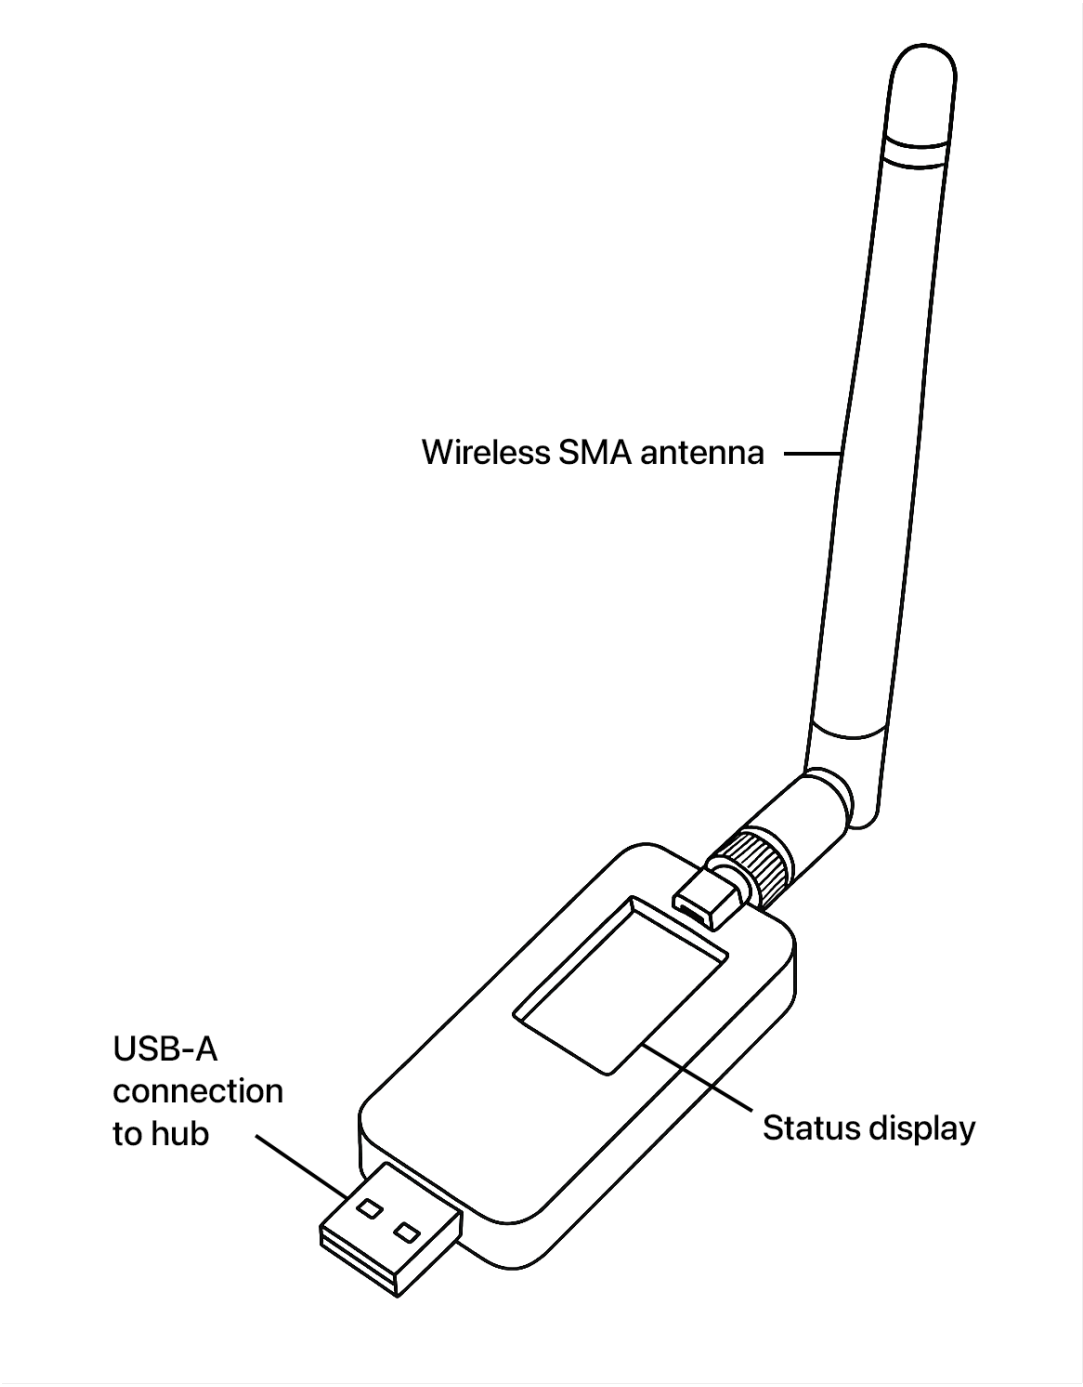


Measurements: 84mm x 30mm x 17mm (antenna 177mm x 35mm with bend)
Weight: 50g
Material: ABS
Installation: Intended for dry, indoor or protected installations

ANPR CONTROLLER

Connects to ANPR cameras over the local network via Ethernet.

Power Input: 100–240V AC, 1.5A Max, 50/60 Hz
Network: Gigabit Ethernet RJ45
Other features: 6 port POE switch

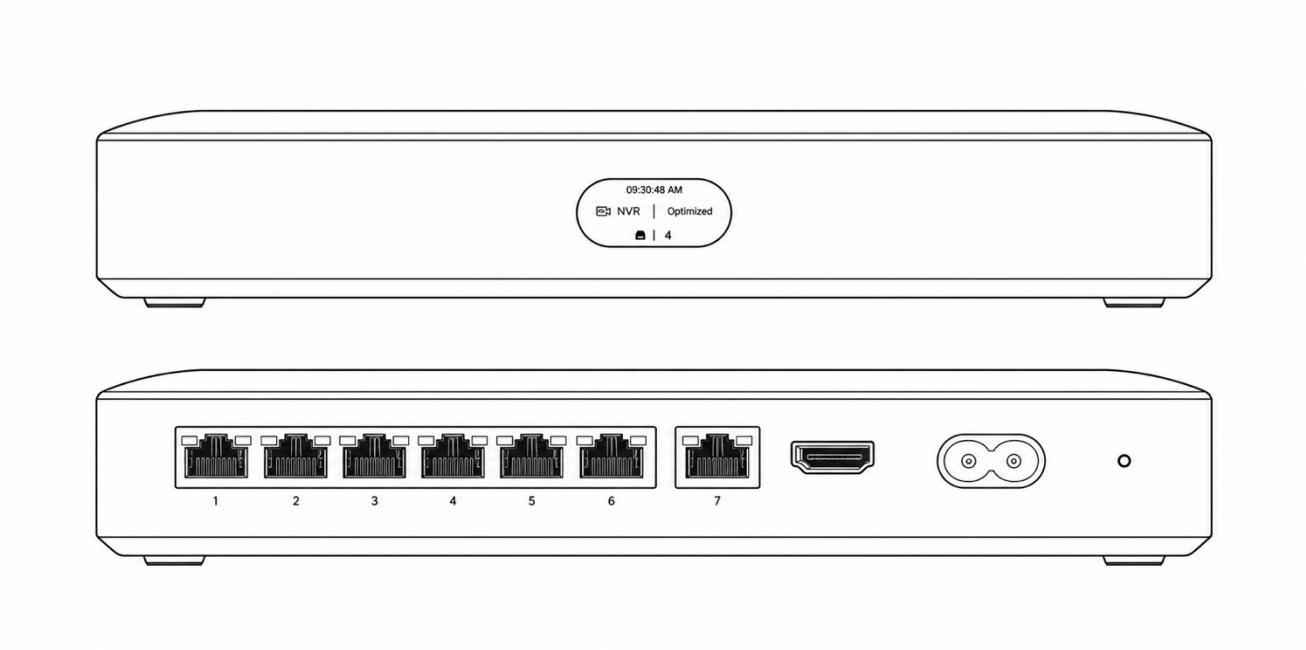

Measurements: 220mm x 220mm x 47mm
Weight: 1.04kg
Material: Polycarbonate
Installation: Intended for dry, indoor or protected installations. Wall or Din Rail mount.